

# Layher Info

Technology  
and Products

April 2007

Helps to reduce the fire load:

## Allround steel toe board

This new steel toe board can be used as a replacement for wooden toe boards in refineries, chemical plants and similar installations, thus helping to reduce the fire load. It is ideal for use in industrial plants.



Their insertion devices make them compatible with other Layher toe boards when connected in a straight run; at corners, toe boards of the same type should be used.

Thanks to the closed profile of the longitudinal section, the toe board is very stiff and sturdy. In addition, dirt is unable to collect inside the toe board.

The caps at the ends provide protection against injuries.

The toe boards do not interlock at scaffolding corners, permitting the same fast installation and removal as with other Layher toe boards.

Grooves running along the length of the toe boards simplify stacking. In addition, the steel toe boards rest directly on the decks, eliminating the gap between the toe board and the deck surface.

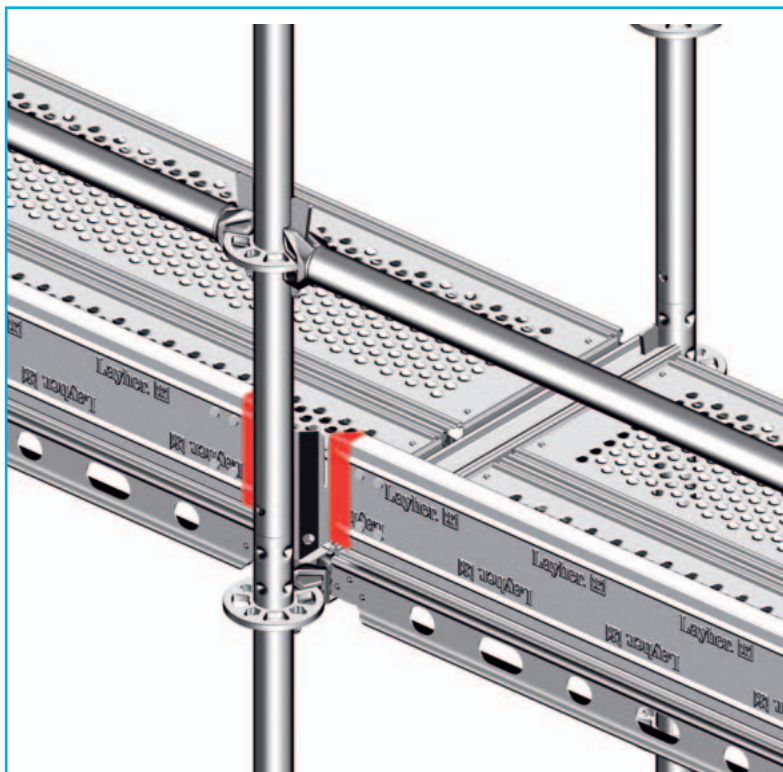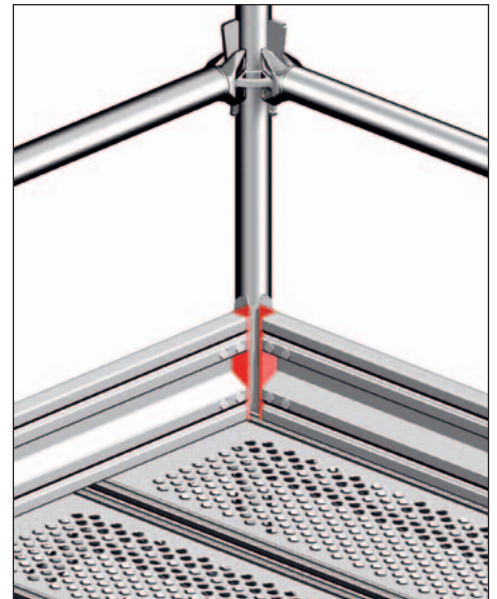

### Advantages:

- ▶ Reduction of the fire load
- ▶ Stiff and Sturdy
- ▶ Protection against injuries
- ▶ Fast installation of individual toe boards
- ▶ Simple stacking
- ▶ No gap between toe board and deck

All prices plus legally valid sales tax (VAT). All dimensions and weights are guideline only. Subject to technical modification. Deliveries shall be made exclusively in accordance with our currently valid General Terms of Sale.

8116.291 04/07

Layher® 

More Possibilities. The Scaffolding System.

Wilhelm Layher GmbH & Co. KG  
Scaffolding Grandstands Ladders

Post Box 40  
74361 Gueglingen-Eibensbach  
Germany

Telefon +49 7135/70-0  
Telefax +49 7135/70-265  
E-Mail [export@layher.com](mailto:export@layher.com)  
[www.layher.com](http://www.layher.com)

# Layher Info


Technology  
and Products

April 2007

Helps to reduce the fire load:

## Allround steel toe board


### Steel toe board variant U

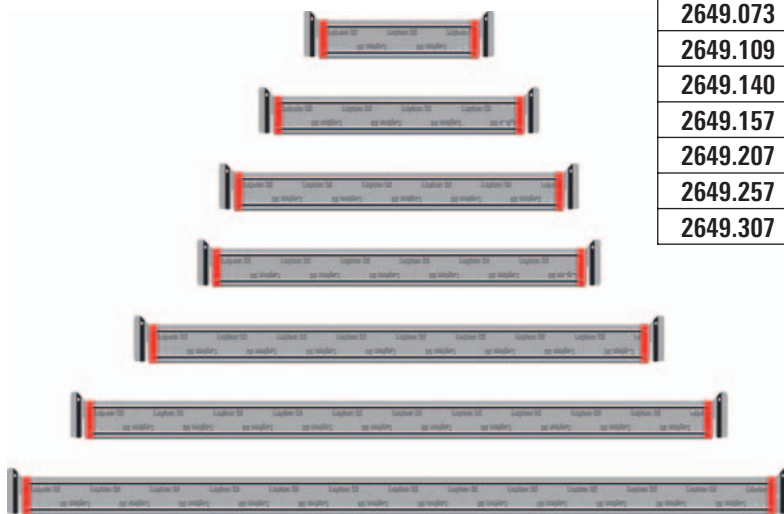

Art. No.	Dimensions	Weight	Price, €
<b>2649.073</b>	<b>0.73 m x 0.15 m</b>	1.8 kg	<b>14.00</b>
<b>2649.109</b>	<b>1.09 m x 0.15 m</b>	2.5 kg	<b>17.00</b>
<b>2649.140</b>	<b>1.40 m x 0.15 m</b>	3.1 kg	<b>20.00</b>
<b>2649.157</b>	<b>1.57 m x 0.15 m</b>	3.4 kg	<b>21.50</b>
<b>2649.207</b>	<b>2.07 m x 0.15 m</b>	4.4 kg	<b>25.50</b>
<b>2649.257</b>	<b>2.57 m x 0.15 m</b>	5.4 kg	<b>30.00</b>
<b>2649.307</b>	<b>3.07 m x 0.15 m</b>	6.3 kg	<b>34.50</b>

### Steel toe board variant O

Art. No.	Dimensions	Weight	Price, €
<b>2648.073</b>	<b>0.73 m x 0.15 m</b>	1.7 kg	<b>14.00</b>
<b>2648.109</b>	<b>1.09 m x 0.15 m</b>	2.4 kg	<b>17.00</b>
<b>2648.140</b>	<b>1.40 m x 0.15 m</b>	3.0 kg	<b>20.00</b>
<b>2648.157</b>	<b>1.57 m x 0.15 m</b>	3.3 kg	<b>21.50</b>
<b>2648.207</b>	<b>2.07 m x 0.15 m</b>	4.3 kg	<b>25.50</b>
<b>2648.257</b>	<b>2.57 m x 0.15 m</b>	5.3 kg	<b>30.00</b>
<b>2648.307</b>	<b>3.07 m x 0.15 m</b>	6.2 kg	<b>34.50</b>

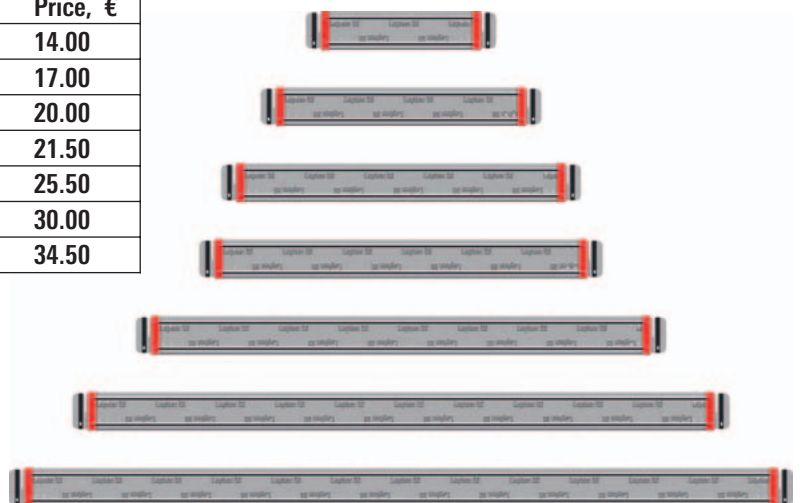

All prices plus legally valid sales tax (VAT). All dimensions and weights are guideline only. Subject to technical modification. Deliveries shall be made exclusively in accordance with our currently valid General Terms of Sale.